



# PANASONIC

## ET-D75LE90 0.36 Super Wide Projection Lens (Three Chip)



By mounting the newly developed ET-D75LE90 ultra short throw lens onto Panasonic's 3-chip DLP™ projector, you can shorten the projection distance by approximately 60 % compared with our ET-D75LE50 short throw lens. This huge savings in space lets you effectively use the high brightness and superb picture quality of the 3-chip DLP™ projector in places that were not previously possible.

### Features:

- By simply mounting the ET-D75LE90 lens, a remarkably wide variety of spatial applications become possible with easy, short-throw projection.
- By mounting the ET-D75LE90 lens onto Panasonic's bright, 20,000-lm-class PDZ21K projector, you can project a large, 200-inch diagonal image from a distance of only about 1.6 m. Screen sizes of up to 600 inches diagonal are supported.



# PANASONIC

## ET-D75LE90 0.36 Super Wide Projection Lens (Three Chip)



### Specifications and Applicable Projectors

Model	ET-D75LE90												
F value	2.5												
Focal length (f:)	7.5 mm												
Throw ratio	WUXGA/Full-HD: Approx. 0.36:1 SXGA+: Approx. 0.39:1 WXGA: Approx. 0.40:1												
Lens shift	Capable (Adjustment range is limited. Lens shift is possible with models other than the PT-RS11K/DS20K/DS20K2/DS12K.) <table border="1"> <thead> <tr> <th></th> <th>Vertical shift</th> <th>Horizontal shift</th> </tr> </thead> <tbody> <tr> <td>PT-RZ12K/DZ21K/DZ21K2/DZ13K/DZ10K:</td> <td>up: 5%, down: 0%</td> <td>left: 6%, right: 6%</td> </tr> <tr> <td>PT-DZ16K/DZ16K2:</td> <td>up: 13%, down: 0%</td> <td>left: 12%, right: 14%</td> </tr> <tr> <td>PT-DW17K/DW17K2/DW11K:</td> <td>up: 18%, down: 0%</td> <td>left: 13%, right: 27%</td> </tr> </tbody> </table> For details, refer to the "Operating Instruction" .		Vertical shift	Horizontal shift	PT-RZ12K/DZ21K/DZ21K2/DZ13K/DZ10K:	up: 5%, down: 0%	left: 6%, right: 6%	PT-DZ16K/DZ16K2:	up: 13%, down: 0%	left: 12%, right: 14%	PT-DW17K/DW17K2/DW11K:	up: 18%, down: 0%	left: 13%, right: 27%
	Vertical shift	Horizontal shift											
PT-RZ12K/DZ21K/DZ21K2/DZ13K/DZ10K:	up: 5%, down: 0%	left: 6%, right: 6%											
PT-DZ16K/DZ16K2:	up: 13%, down: 0%	left: 12%, right: 14%											
PT-DW17K/DW17K2/DW11K:	up: 18%, down: 0%	left: 13%, right: 27%											
Dimensions (W x H x D)	154 x 154 x 448.5 mm (6-1/16 x 6-1/16 x 17-21/32 in)												
Weight	Approx. 6.5 kg (14.3 lbs)												
Applicable projectors	PT-RZ12K/RS11K PT-DZ21K2/DS20K2/DW17K2/DZ16K2 PT-DZ21K/DS20K/DW17K PT-DZ16K PT-DZ13K/DS12K/DW11K/DZ10K												



Note: Due to lens characteristics, some screen types may be subject to focusing problems or strong hot spots where large differences in brightness occur between the hot spots and surrounding areas. If this should occur, please ask a qualified technician or your dealer for solutions.

### Dimensions

unit: mm (inch)

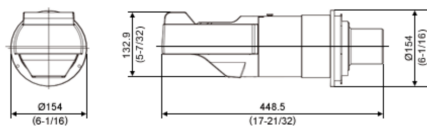

### PT-RZ12K/RS11K

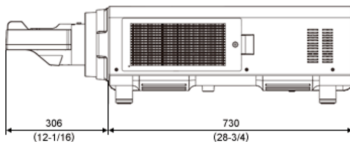

### USA / Canada / Europe

US and Canada: 800-794-1407  
Technical Support: 888-584-8324  
Europe: +44 (0) 20 8445 0267

VER is your global resource for  
Production Equipment, Support and Creative Solutions